SUPPLY BRIDGE ASIA
Power equipment from China, delivered on time

COMPANY PROFILE 2026 · HANGZHOU, CHINA

Transformers and generator sets from China. Quoted fast, checked before you pay the balance.

Distribution transformers, compact substations, switchgear and diesel generator sets for EPC contractors, mines, utilities and rental fleets. One contract with our company, factory tests you can see, and shipment to your port.

Oil-immersed transformers
630–2,500 kVA · 11 / 33 kV

Diesel generator sets
100–1,500 kW · open or container

Substations & switchgear
Compact substations · RMU · LV panels

Within 24 h
typical quotation reply

3–5 weeks
transformer production

4–6 weeks
generator set production

12 months
warranty in the contract

Hangzhou Supply Bridge Asia Supply Chain Co., Ltd.
杭州亚供桥供应链有限公司

zane@supplybridgeasia.com
WhatsApp +86 177 5731 2044 · supplybridgeasia.com

PRODUCT LINES

The equipment that connects a site to power

Standard ratings below. Other ratings, voltages and 60 Hz versions on request.

Oil-immersed transformers

630–2,500 kVA

11 / 0.415 kV and 33 / 0.415 kV, IEC 60076, Dyn11, ONAN, copper or aluminium windings.

Dry-type transformers

1,600–2,500 kVA

Cast-resin, 11 kV class, with IP enclosure for indoor substations.

Diesel generator sets

100–1,500 kW

Weichai, Yuchai, Shangchai or Cummins engines. Open frame, silent canopy or 40 ft container.

Compact substations

630–1,600 kVA

MV switchgear, transformer and LV board in one enclosure, built to your single-line diagram.

Ring main units & MV switchgear

12–36 kV

Gas-insulated RMUs and metal-clad panels for distribution networks and plant substations.

LV panels, ATS & paralleling

400 V

Main distribution boards, capacitor banks, automatic transfer switches and paralleling panels.

HOW IT WORKS

Simple process. Clear timing.

1

Send your requirement

Rating, voltage, quantity, destination port. By email, WhatsApp or our website form.

2

Get the quote

We typically reply within 24 hours with price, data sheet, applicable test reports and lead time.

3

Production and tests

Transformers 3–5 weeks, generator sets 4–6 weeks after deposit. Routine tests witnessed by video or your inspector.

4

Balance, then shipment

You review the test report, photos and video, pay the balance, and we ship to your port.

What we put in writing

Every order has one sales contract with our company, stating the specification, test scope, acceptance criteria, lead time, payment schedule and a 12-month warranty. If something is wrong, you deal with us, and we deal with the factory.



33 kV units in the workshop.



Generator set on load test.



Sealed for sea transport.



Export cases on site.

DISTRIBUTION TRANSFORMERS

Oil-immersed, 11 kV and 33 kV, 630–2,500 kVA

Built to IEC 60076, 50 Hz, Dyn11, ONAN, designed for 50 °C ambient. Copper or aluminium windings. Losses and impedance are stated in every quote.

11 / 0.415 kV

RATING	NO-LOAD LOSS	LOAD LOSS	IMPEDANCE
630 kVA	810 W	6,200 W	4.0 %
1,000 kVA	1,150 W	10,300 W	4.0 %
1,600 kVA	1,640 W	14,500 W	4.0 %
2,500 kVA	2,290 W	21,200 W	4.0 %

33 / 0.415 kV

RATING	NO-LOAD LOSS	LOAD LOSS	IMPEDANCE
630 kVA	830 W	7,860 W	6.5 %
1,000 kVA	1,150 W	11,500 W	6.5 %
1,600 kVA	1,690 W	16,600 W	6.5 %
2,500 kVA	2,360 W	23,200 W	6.5 %

Typical design values. Loss tolerance +15 % per IEC 60076-1. Final guaranteed values, tapping range, insulation levels, weights and dimensions are stated in the quote for your exact specification.

With every unit

- Routine test report: ratio, vector group, winding resistance, insulation, applied and induced voltage, losses, impedance
- English nameplate and packing list
- Export wooden case or seaworthy packing

Type tests

Type test reports from CNAS / ILAC-MRA accredited laboratories, including 2,500 kVA 33 kV and 1,250 kVA 11 kV oil-immersed designs. Full reports are sent with your quotation.

Copper or aluminium

Aluminium windings cost noticeably less for the same rating and losses class. We quote both on request, so you can choose.



33 kV units in the workshop.



Sealed for sea transport.



Export cases on site.



40 ft containerized generator set.

Substations, switchgear and panels

Compact substations (MV switchgear, transformer and LV board in one enclosure), gas-insulated ring main units and metal-clad switchgear (RMU type tested to IEC 62271-200, -100, -102, 24 kV, 630 A, 20 kA), LV distribution boards, capacitor banks, ATS and paralleling panels. Quoted from your single-line diagram; we state which type test reports apply to the exact design before you order.

DIESEL GENERATOR SETS


100–1,500 kW, 400 V / 50 Hz, load-tested before shipment

Prime and standby power for rental fleets, mines, construction and industrial sites. Engine, alternator and controller makes are stated in every quote.


ITEM	STANDARD OFFER
Ratings	100, 300, 500, 1,000 and 1,500 kW prime; others on request
Engines	Weichai · Yuchai · Shangchai · Cummins
Build	Open frame, silent canopy, or 40 ft sound-attenuated container with fuel tank
Standard scope	Brushless alternator 400/230 V, 3-phase, 0.8 pf · digital controller with auto start/stop and protections · main breaker · radiator · batteries · silencer
Options	ATS, synchronising / paralleling panels, remote monitoring, 60 Hz and other voltages
Production	4–6 weeks after deposit
Documents	Factory load-test report, engine and alternator certificates, English manuals and spare-parts list



1,500 kW class, open frame.

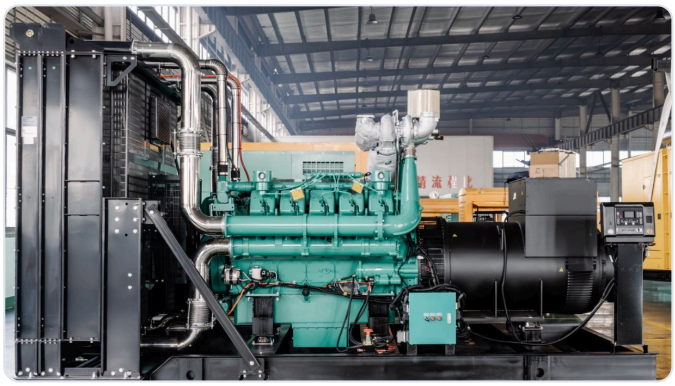

1,000 kW class, ready for test.

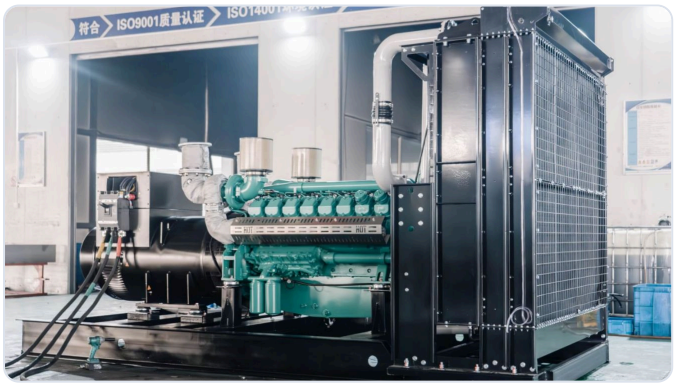

Connected for load test.



40 ft containerized version.

See your unit on load

Before you pay the balance, we show your set running on the load bank by live video, with the controller readings. Third-party inspection welcome.

Parts and service

Engines from makers with service networks in Africa, the Middle East and Asia. Spare-parts kits can ship with the set.

WHO WE ARE

Your contracted supplier in China

We are a sourcing and export company, not a manufacturer. Your quotation, sales contract and invoice come from our company. We select the manufacturer, check the specification, organise testing and inspection, and ship the goods.

Legal name	Hangzhou Supply Bridge Asia Supply Chain Co., Ltd. 杭州亚供桥供应链有限公司
Credit code	91330102MAKM13YP8D
Address	Room 1202-16, No. 18 Jiefang Road, Shangcheng District, Hangzhou, Zhejiang, China
Customs	Import and export consignor, Qianjiang Customs, Hangzhou · code 3301960NBT
Bank	Industrial and Commercial Bank of China, Hangzhou Zhijiang Branch · SWIFT ICBKCNBJZJP. Account details only on contract and proforma invoice.

Check us yourself

- Search our credit code on gsxt.gov.cn
- Check our customs registration on credit.customs.gov.cn
- Ask for a video call, or a live video from the factory, before you order
- Our bank details never change by email. If you receive a change notice, call us before paying.

PAYMENT

You see the evidence before you pay the balance

Deposit with the order

Typically 30 % by bank transfer (T/T) to our company account when the contract is signed.

Balance after inspection

The remaining 70 % after you review the test report, photos and video, and before shipment. Your own inspector (SGS, BV, Intertek) is welcome.

Prices and shipping

FOB Shanghai, Qingdao or Ningbo as standard; CFR or CIF to your port on request. Minimum order one unit.

Send your requirement

Rating, voltage, quantity, destination port and deadline. We typically reply within 24 hours with price, data sheet and lead time.

Zane Zhou, Founder · zane@supplybridgeasia.com · WhatsApp +86 177 5731 2044 · supplybridgeasia.com